


## Z-34/22IC BOOM LIFT

### 34FT DIESEL BOOM LIFT ARTICULATED

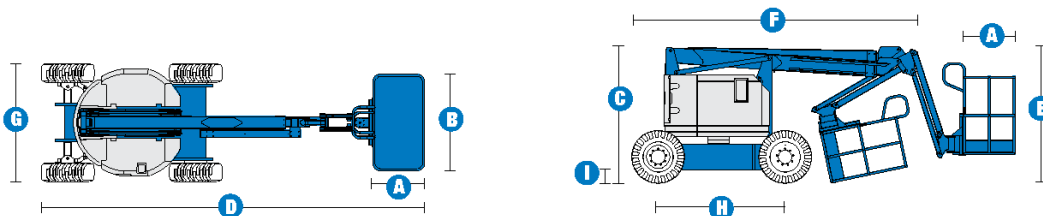

#### MODEL Z™-34/22 IC

MEASUREMENTS	Metric	US
Working height maximum*	12.62 m	40 ft 10 in
Platform height maximum	10.62 m	34 ft 10 in
Horizontal reach maximum	6.78 m	22 ft 3 in
Up and over clearance maximum	4.57 m	15 ft
<b>A</b> Platform length	0.76 m	2 ft 6 in
<b>B</b> Platform width	1.42 m	4 ft 8 in
<b>C</b> Height - stowed	2.06 m	6 ft 9 in
<b>D</b> Length - stowed	5.66 m	18 ft 7 in
<b>E</b> Storage height	2.29 m	7 ft 6 in
<b>F</b> Storage length	4.11 m	13 ft 6 in
<b>G</b> Width	1.85 m	6 ft 1 in
<b>H</b> Wheelbase	1.88 m	6 ft 2 in
<b>I</b> Ground clearance - centre	0.17 m	6.5 in

#### PRODUCTIVITY

Lift capacity	227 kg	500 lbs
Platform rotation	180°	180°
Vertical jib rotation	139°	139°
Turntable rotation	355° non-continuous	
Turntable tailswing	zero	zero
Drive speed - stowed	4.8 km/h	3.0 mph
Drive speed - raised**	1.1 km/h	0.68 mph
Gradeability - stowed***	45%	45%
Turning radius - inside	1.80 m	5 ft 11 in
Turning radius - outside	4.11 m	13 ft 6 in
Controls	12 V DC proportional	
Tyres - foam-filled	10x 16.5 in NHS	

#### POWER

Power source	Kubota D-1105 3-cylinder diesel 19.4 kW (26 hp)	
Auxiliary power unit	12V DC	12V DC
Hydraulic tank capacity	71.9 L	19 gal
Fuel tank capacity	34.1 L	9.0 gal

#### WEIGHT\*\*\*\*

	4,854 kg	10,701 lbs
--	----------	------------

#### STANDARDS COMPLIANCE

ANSI A92.5, CSA B354.4, CE Compliance, AS 1418.10

\*The metric equivalent of working height adds 2m to platform height. U.S. adds 6ft to platform height.

\*\*In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

\*\*\*Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\*Weight will vary depending on options and/or country standards.

#### RANGE OF MOTION Z™-34/22 IC

