

850-BL SCISSOR LIFT

ATHENA

	Athena HE	Athena 850
Basket capacity	250 kg (2 op.)	250 kg (2 op.)
Max working height	7.8 m	7.9 m
Max height basket floor	5.8 m	5.9 m
Moving height	4.0 m	6.1 m
Lateral levelling for moving at heights	-	+ / - 4°
Powered (option)	-	Petrol Honda IGX390
Powered Standard	Petrol Honda IGX390	Diesel Hatz 1B40
Powered (option) BI energy	-	Lithium Ion with Hatz 1B40 Diesel
Accelerator	Automatic	Automatic
Undercarriage	Retractable	BI-Levelling
Basket levelling	Automatic	Automatic
Longitudinal levelling front	+/- 13°	+/- 16°
Longitudinal levelling rear	Rear +/- 14°	+/- 20°
Lateral levelling	+/- 23°	+/- 15°
Power generator (option)	220V-1kW (IGX390, 1B40)	220V-1kW
Electric motor	220V-2kW	220V-2kW
Hydraulic commands	Proportionals	Proportionals
Direction-control system	Yes	Yes
Easy-drive system	No	Yes
Kit for high speed	Max 2.20 km/h	Max 2.20 km/h
Ground emergency	Yes	Yes
Control of inclination	Automatic	Automatic
Gradeability	25°	25°
Side slope	21°	21°
Length	2.14 m	1.94 m
Width	0.80 ÷ 1.24 m	1.30 ÷ 1.50 m
Minimum machine height with folded railings	1.88 m	1.98 m
Total weight	1761 kg	1990 kg
Compliance	EN 280, ANSI, CSA, ASNZS1418	EN 280, ANSI, CSA, ASNZS1418

HIRE

SALES

SERVICE

LEASE


TRANSPORT

850-BL SCISSOR LIFT

ATHENA

ATHENA HE


DIMENSIONS

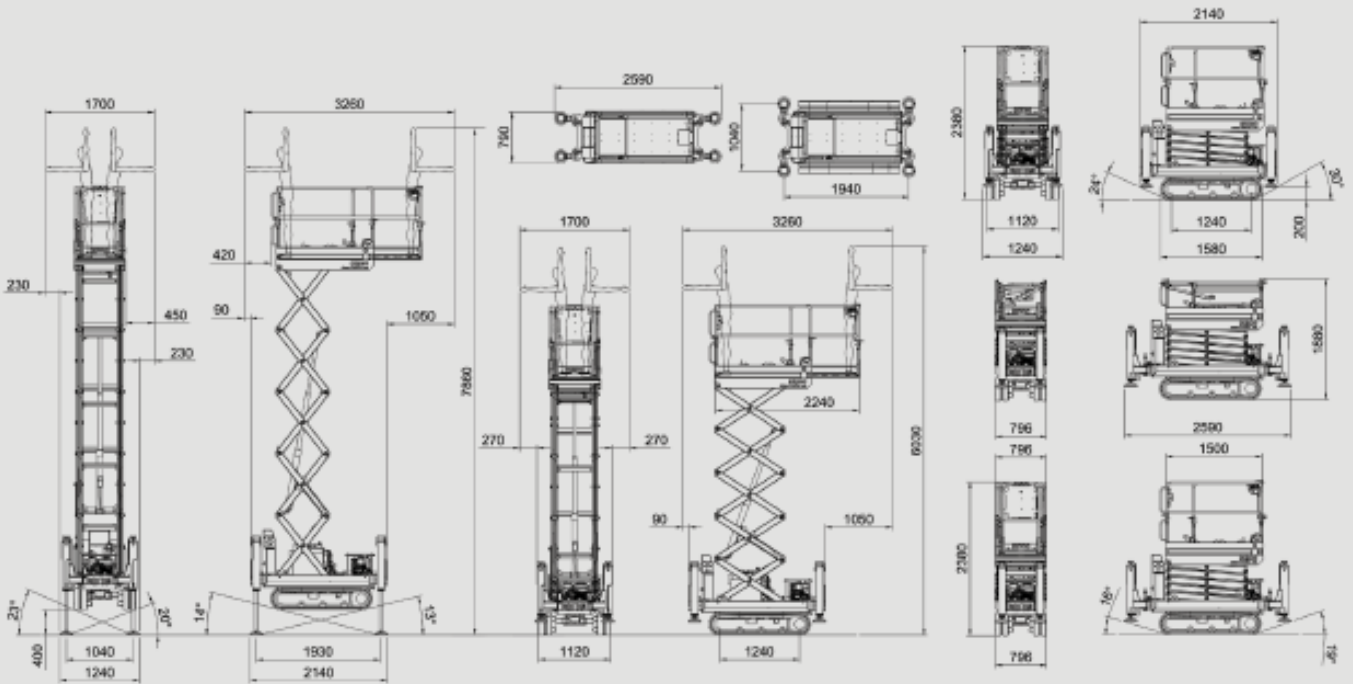

ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

ATHENA 850

DIMENSIONS

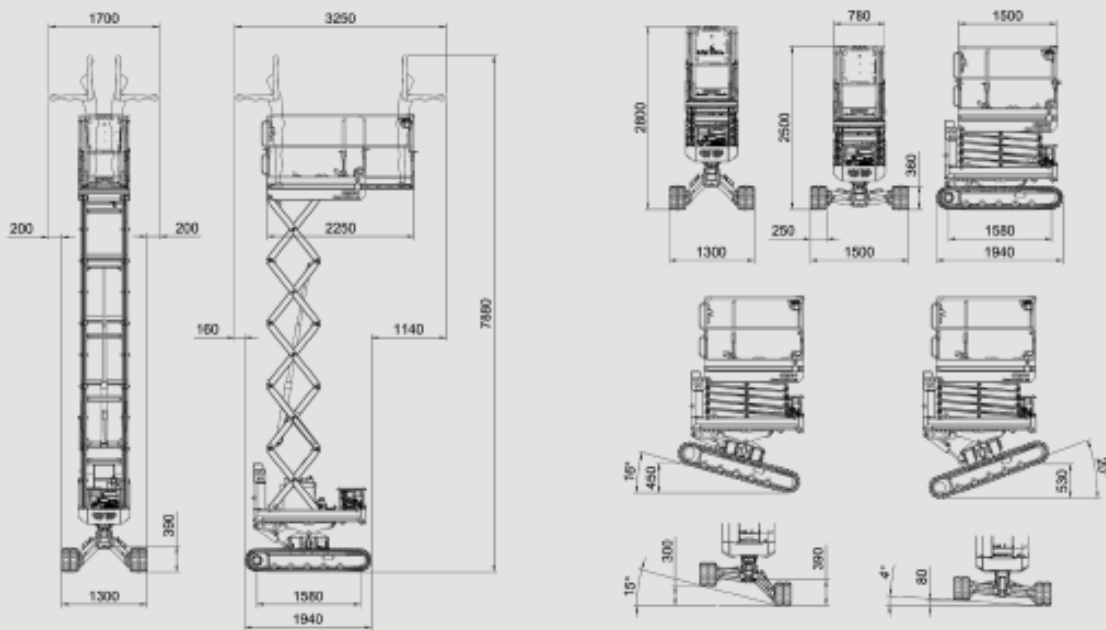

ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

WA

NT

QLD

NSW

VIC

SA