


540P-180 HI-VIZ TELEHANDLER

4.0T DIESEL 18.0M TELEHANDLER



SPECIFICATION CONSTRUCTION LOADALLS 531-70/541-70/535-95/533-105/535-125 HiViz/540-140 HiViz/540-170/540-180 HiViz/540-200

STATIC DIMENSIONS

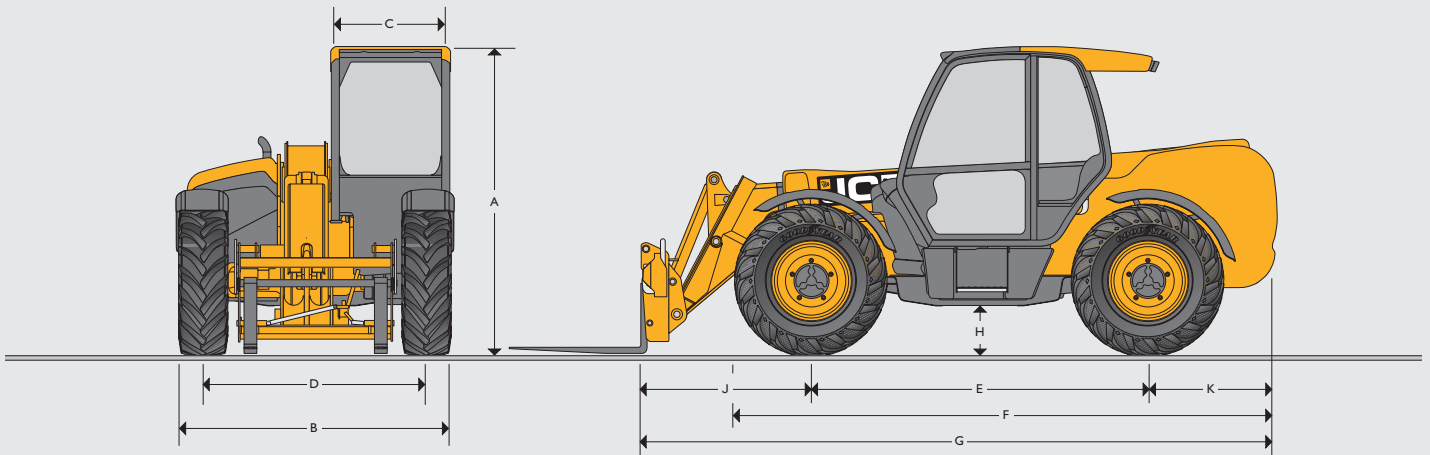

STATIC DIMENSIONS

Machine model		531-70	541-70	535-95	533-105	535-125 HiViz	540-140 HiViz	540-170	540-180 HiViz	540-200
A Overall height	m	2.49	2.49	2.49	2.49	2.59	2.59	2.69	2.59	2.72
B Overall width (over tyres)*	m	2.23	2.23	2.36	2.36	2.35	2.35	2.44	2.35	2.44
C Inside width of cab	m	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
D Front track	m	1.81	1.81	1.87	1.87	1.90	1.90	1.90	1.90	1.97
E Wheelbase	m	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75	2.75
F Overall length to front tyres	m	4.38	4.38	4.38	4.38	4.74	4.74	5.08	4.75	5.09
G Overall length to front carriage	m	4.99	4.99	4.99	5.38	5.80	6.23	6.36	6.27	6.81
H Ground clearance	m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.41
J Front wheel centre to carriage	m	1.25	1.25	1.20	1.62	1.68	2.11	1.94	2.15	2.39
K Rear wheel centre to rear face	m	0.99	0.99	1.04	1.01	1.37	1.37	1.67	1.37	1.67
Overall width with stabilisers fully deployed	m	NA	NA	NA	2.63	2.57	2.57	3.55	3.39	3.82
Outside turn radius (over tyres)	m	3.7	3.7	3.7	3.7	3.75	3.75	4.10	3.75	4.1
Carriage rollback angle	degrees	42.6	42.6	41.0	41.2	37.0	37.0	39	36.50	39
Carriage dump angle	degrees	37.5	37.5	24.0	24.0	12.5	12.5	8.8	12.50	8.8
Weight	kg	7060	7850	8215	8850	10066	10880	12060	11380	12985
Tyres		15.5/80-24	15.5/80-24	15.5/80-24	15.5/80-24	15.5/80-24	15.5/80-24	15.5/80-24	15.5-25	17.5-25

* Type dependent

540P-180 HI-VIZ TELEHANDLER

4.0T DIESEL 18.0M TELEHANDLER



SPECIFICATION

CONSTRUCTION LOADALLS 531-70/541-70/535-95/533-105/535-125 HiViz/540-140 HiViz/540-170/540-180 HiViz/540-200

ENGINE

JCB EcoMAX T4 Final, Capacity 4 cylinder 4.4litrs, Aspiration turbocharged cooled

	531-70	541-70	535-95	533-105	535-125 HiViz	540-140 HiViz	540-170	540-180 HiViz	540-200
Engine 55kW (75hp) @ 2200rpm, 400Nm torque at 1300rpm	Standard	Standard	Standard	Standard	Standard	Standard	Option	Standard	Standard
Engine 81kW (109hp) @ 2200rpm, 512Nm torque at 1300rpm	Option	Option	Option	Option	Option	Option	Standard	N/A	Option
Engine 93kW (125hp) @ 2200rpm, 550Nm torque at 1300rpm	Option	Option	Option	Option	Option	Option	Option	N/A	Option

HYDRAULIC CYCLE TIMES

	531-70	541-70	535-95	533-105	535-125 HiViz	540-140 HiViz	540-170	540-180 HiViz	540-200
Boom raise	7.2	8.8	9.1	8.8	10.4	13.5	22.7	13.8	17.3
Boom lower	5.4	6.5	7.7	8.5	8.1	11	23.4	10.2	15.9
Extend	6.8	6.8	10.5	13.2	15.7	15.6	18.3	22.4	28.1
Retract	5	5	11.2	13.6	12.8	14.4	16.7	17.9	22.7
Bucket dump	3.5	3.5	2.4	2.4	1.8	1.7	4.2	2.9	6.1
Bucket crowd	2.9	2.9	3.5	3.4	2.3	2.0	4.6	2.6	5.9

HYDRAULICS

	Hydraulic System Pressure (bar)	Max. Pump flow (litres)
531-70	241	82
541-70	260	82
535-95	241	82
533-105	241	82
535-125	260	110
540-140	260	110
540-170	260	90+72
540-180	260	103
540-200	260	110

TRANSMISSION

Torque converter, 4 speed powershift gearbox.
Travel speed 531-70/541-70/535-95/533-105: 29kph, 33kph (when 2/4WD select is specified).
Travel speed 535-125/540-140/540-170: 29kph. Optional 33kph transmission.
Travel speed 540-180/540-200: 29kph.

BRAKING

Service brake: Servo-assisted, hydraulically oil-immersed multi-disc on front and rear axle.
Parking brake: Hand operated disc brake on output of gearbox. (93kW/125hp – oil immersed disc type).

CAB

Conforms to ROPS ISO 3471 and FOPS ISO 3449

OPTIONS

Front and rear working lights, rotating flashing beacon, fire extinguisher, traction and industrial tyres, electrical 2/4WD select, limited slip differential in front axle, windscreen and roof guard, air suspension seat, deluxe cab trim, roof and front screen blind, radio kit, air conditioning, reversing fan, deluxe trim, armrest (SLC only), roof moulding.
 Single lever mechanical joystick, with push button extend and retract.
 Single lever servo joystick option on 535-125, 540-140 & 540-180.
 Options of rear or rear & offside reversing cameras with the extra option to add pulse radar all with dash mounted screen.
 Centralised greasing available on the 540-180 HiViz

NOISE AND VIBRATION

	55kW	81kW	93kW	Uncertainty	Measurement conditions.
Noise at the operator station	LpA	77	80	81	+/- 1 dB Determined in accordance with the test method defined in EN12053.
Noise emission from the machine LWA		104	106	107	+/- 1 dB Guaranteed equivalent sound power (external noise) determined in accordance with the dynamic test conditions defined in 2000/14/EC.
Hand-arm vibration	m/s ²	<2.5	<2.5	<2.5	N/A ISO 5349-2:2001 dynamic test conditions.

All JCB Loadalls comply with Australian standard 1418.19

HIRE

SALES

SERVICE

LEASE

TRANSPORT

540P-180 HI-VIZ TELEHANDLER

4.0T DIESEL 18.0M TELEHANDLER



SPECIFICATION

CONSTRUCTION LOADALLS 531-70/541-70/535-95/533-105/535-125 HiViz/540-140 HiViz/540-170/540-180 HiViz/540-200

LIFT PERFORMANCE

	540-140 HiViz Stabilisers retracted Sway	540-140 HiViz Stabilisers extended Sway	540-170 Stabilisers retracted Sway	540-170 Stabilisers extended Sway
Maximum lift capacity	kg 4000	kg 4000	kg 4000	kg 4000
Lift capacity to full height	kg 1300	kg 3100	kg 1300	kg 2200
Lift capacity at full reach	kg 200	kg 900	kg 0	kg 450
Lift height	m 12.89	m 13.78	m 11.57	m 16.7
Reach at maximum lift height	m 3.09	m 1.01	m 4.32	m 1.97
Maximum forward reach	m 9.70	m 9.64	m 9.04	m 12.50
Reach with 1 tonne load	m 6.61	m 9.64	m 5.76	m 11.70
Placing height	m 12.40	m 13.30	m 10.90	m 16.20

Complies with stability test EN 1459 Annex B. Chassis Levelling (Sway) with stabilisers retracted (Sway angle $\pm 9^\circ$).

LIFT PERFORMANCE

	540-180 HiViz Stabilisers retracted Sway	540-180 HiViz Stabilisers extended Sway	540-200 Stabilisers retracted Sway	540-200 Stabilisers extended Sway
Maximum lift capacity	kg 4000	kg 4000	kg 4000	kg 4000
Lift capacity to full height	kg 500	kg 2400	kg 500	kg 1500
Lift capacity at full reach	kg 0	kg 250	kg 0	kg 200
Lift height	m 10.69	m 17.51	m 10.27	m 20
Reach at maximum lift height	m 6.92	m 1.88	m 6.42	m 2.82
Maximum forward reach	m 10.47	m 13.34	m 9.63	m 15.9
Reach with 1 tonne load	m 6.25	m 11.72	m 6.25	m 10.65
Placing height	m 10.0	m 17.0	m 9.1	m 19.1

Complies with stability test EN 1459 Annex B. Chassis Levelling (Sway) with stabilisers retracted (Sway angle $\pm 9^\circ$).

WA

NT

QLD

NSW

VIC

SA