

GTH-2506 TELEHANDLER

2.5T DIESEL 6.0M TELEHANDLER



MODEL	GTH™-2506	
MEASUREMENTS	Metric	US
Lifting height maximum	5.79 m	19 ft
Lifting capacity maximum	2,500 kg	5,511 lbs
Lift capacity at maximum height	1,800 kg	3,968 lbs
Lift capacity at maximum reach	800 kg	1,764 lbs
Forward reach maximum	3.35 m	11 ft
Reach at maximum height	0.60 m	2 ft
A Height	1.92 m	6 ft 4 in
B Height at steering wheel	1.25 m	4 ft 1 in
C Width	1.81 m	5 ft 11 in
D Inside cab width	0.75 m	2 ft 6 in
E Track	1.50 m	4 ft 11 in
F Wheelbase	2.32 m	7 ft 7 in
G Length at fork-holder plate	3.98 m	13 ft 1 in
H Ground clearance	0.33 m	1 ft 1 in
I Overall length	5.18 m	17 ft
M1 Obstruction angle	90°	90°
M2 Departure angle	70°	70°

PRODUCTIVITY

Inside/outside turning radius	1.70 m/3.35 m	5 ft 7 in / 11 ft
Lifting/lowering speed	10 / 8 sec	10 / 8 sec
Extension/retraction speed	9 / 7 sec	9 / 7 sec
Break-out force	3,700 kg	8,157 lbs
(with 500 L bucket SAE J732)		
Drawbar pull	4,230 kg	9,325 lbs
Drive speed	24 km/h	15 mph
Fork-holder plate rotation	130°	130°
Floating forks	L 1200 mm Section 100 x 40 mm	L 3 ft 11 in Section 4 in x 1.6 in
Tyres (DIN 70361)	12-16.5" PR10 8-hole wheel rim	

POWER

Engine	Deutz TD 2011 L04 Turbo diesel 68 kW (91 hp), Tier 3	
Tank capacities		
Fuel	60 L	15.9 gal
Engine oil	10 L	2.6 gal
Hydraulic oil	65 L	15.9 gal
Hydraulic output/pressure	70 L/min – 270 bar	18.5 gal/min – 3,916 psi




WEIGHT

Weight*	5,360 kg	11,817 lbs
---------	----------	------------

STANDARDS COMPLIANCE

AS 1418.19, EN 1459, Operating cab conforms to ISO3471 (ROPS) and ISO3449 (FOPS), Low emission engine conforms to UE 97/68 directives

* Weight will vary depending on options and/or country standards
**** Load ratings vary depending on attachment

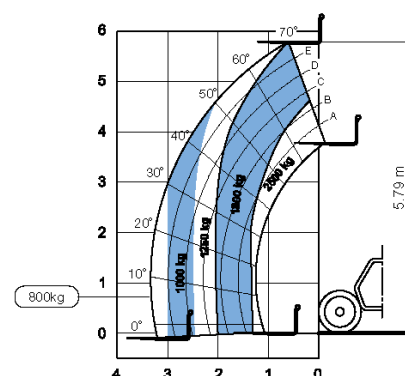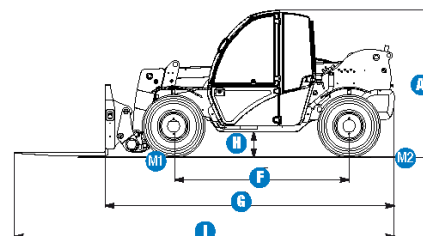

Lift capacity chart with floating forks
(L 1200 mm-section 100 x 40 mm)****