

[HIRE](#)
[SALES](#)
[SERVICE](#)
[LEASE](#)
[TRANSPORT](#)

## TURBOFARMER 30.9 - 100 EE TELEHANDLER

### 3.0T DIESEL 10.0M TELEHANDLER



PERFORMANCE AND FEATURES	TF30.9-100 EE		
<b>PERFORMANCE</b>			
Total unladen weight (kg)	6650		
Maximum capacity (kg)	3000		
Lifting height (m)	8,3		
Maximum reach (m)	5,8		
Maximum operating height (m)	4,8		
Maximum operating reach (m)	1,6		
Capacity at maximum height (kg)	1100		
Capacity at maximum reach (kg)	550		
Lateral boom movement (mm)	-		
Tilting correction (%)	-		
Boom sections	3		
<b>POWERTRAIN</b>			
Turbo motor	Kubota V3800		
Displacement/cylinders	3800/4		
Engine Power (kW/HP)	74/100		
Anti-pollution technology	TIER 3, STAGE IIIA		
Reversible fan	●		
Maximum speed (km/h)	40		
Fuel tank (l)	80		
AdBlue tank (l)	-		
Hydrostatic transmission	● - 2V		
EPD	-		
Axles	Axial		
Reduction hub	Epicyclic		
Machine brakes	Dry discs		
Automatic parking brake	●		
<b>HYDRAULIC</b>			
Hydraulic pump	LS+FS		
Flow rate/pressure (l/min - bar)	140-210		
Hydraulic tank	85		
Hydraulic outlet at the top of the boom	●		
Rear hydraulic outlets	○		
<b>CAB</b>			
Cab configuration	ECO		
MCDC	Complet		
FOPS LIV II cab	●		
ROPS cab	●		
Cab commands	Electronic joystick		
Tilting Cab	-		
Reverse shuttle	Dual reverse		
<b>CONFIGURATION</b>			
Cab suspension	-		
Boom suspension	●		
Suspension on axles	-		
Work headlights on cab	●		
Sun blind	●		
Tac-lock	●		
Provision for a platform	○		
Two floating forks	●		
Inching-Control	●		
Four-wheel drive	●		
Four-wheel steering	●		
Three steering modes	●		
Standard tyres	400/70-20		
Optional tyres	-		
Stabilisers	-		
Turret rotation	-		
Type approval as an agricultural tractor	-		
Approval with PNEUMATIC braking	-		
Approval with HYDRAULIC braking	-		
PTO	-		
3-point linkage	-		

- Not Available. ● standard. ○ optional.

[WA](#)
[NT](#)
[QLD](#)
[NSW](#)
[VIC](#)
[SA](#)

HIRE

SALES

SERVICE

LEASE


TRANSPORT

## TURBOFARMER 30.9 - 100 EE TELEHANDLER

3.0T DIESEL 10.0M TELEHANDLER




### LOAD CHARTS

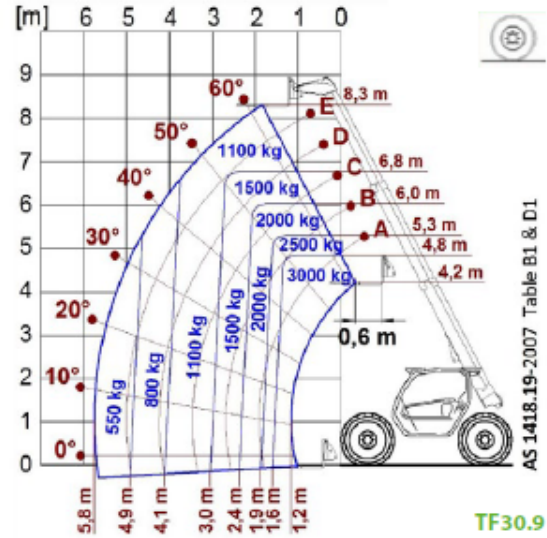

### DIMENSIONS

	TF30.9 100 EE		
A (mm)	4330		
B (mm)	990		
C (mm)	2740		
D (mm)	600		
E (mm)	3910		
F (mm)	340 (300 L)		
H (mm)	2100		
M (mm)	995		
P (mm)	2120 (2020 L)		
R (mm)	3930		
S (mm)	4660		
Z (mm)	850		

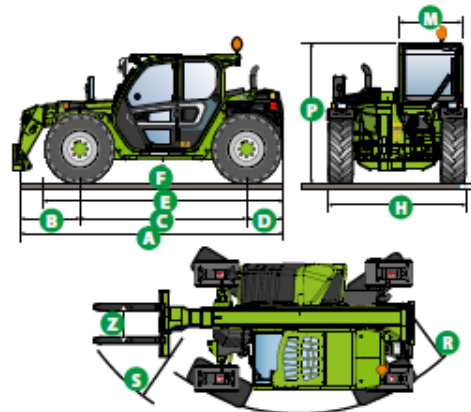

WA

NT

QLD

NSW

VIC

SA