


H9XD-ECD8 FORKLIFT

9.0T DIESEL CONTAINER HANDLER




> DIMENSIONS

STANDARD CAB POSITION

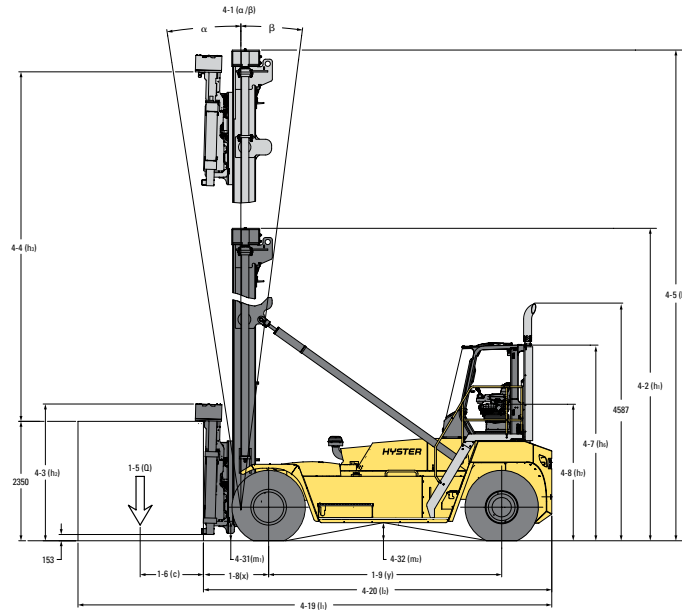

OPTIONAL RAISED CAB POSITION

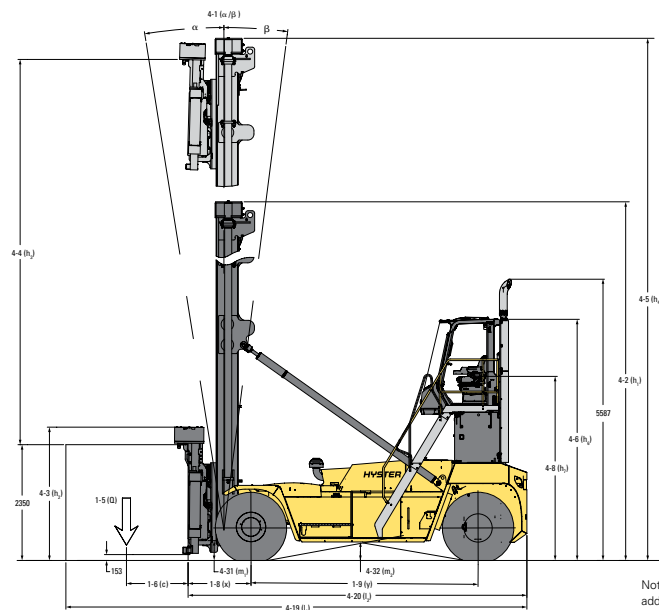

Note: For raised cab version add 1000mm for h6 and h7.

- (1) Raised cabin may result in reduced capacity since the "carry" height will be higher.
- (2) Load capacity at highest container positions may be less, depending on truck model, stacking height and tyres.
- (3) Minimum/maximum height of twistlocks.
- (4) With cab mounted work lights add 191 mm, with strobe light add 132 mm.
- (5) With raised cabin position add 1000 mm.
- (6) Includes 200 mm clearance. FULL / REDUCED steer cylinder stroke.
- (7) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.