



H4.0UT FORKLIFT

4.0T DIESEL FORKLIFT

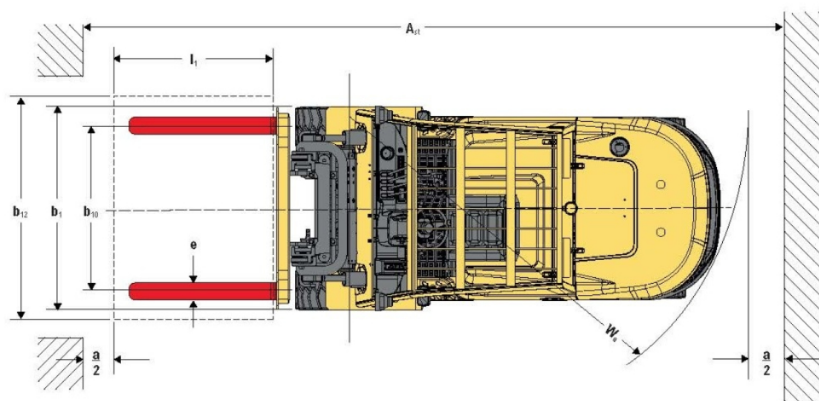

TRUCK DIMENSIONS

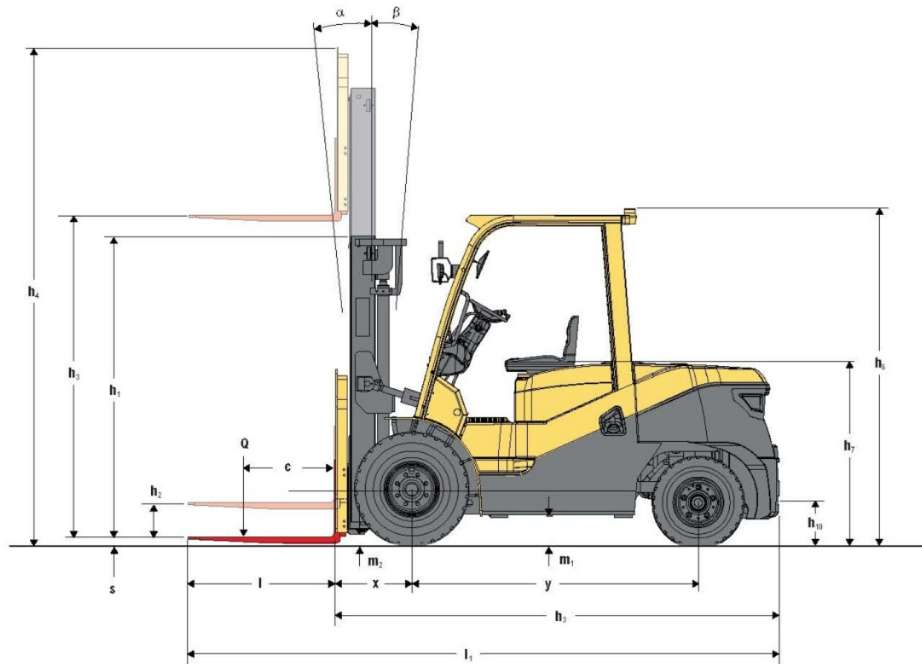

HIRE

SALES

SERVICE

LEASE

TRANSPORT

H4.OUT FORKLIFT

4.0T DIESEL FORKLIFT



H4.OUT SPECIFICATIONS

DISTINGUISHING MARK	H4.OUT				
	1.1	1.2	1.3	1.4	1.5
1.1	Manufacturer	Hyster			
1.2	Model designation	H4.OUT			
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Diesel	Diesel Stage V	Dual fuel	LPG
1.4	Operator type: hand, pedestrian, standing, seated, order-pickler	Seat			
1.5	Rated capacity/rated load	(kg)	4000		
1.6	Load centre distance	(mm)	500		
1.8	Load distance, centre of drive axle to fork	(mm)	575		
1.9	Wheelbase (with mast vertical)	(mm)	2100		
2.1	Service weight	kg	6435		
2.2	Axle loading, laden front/rear	kg	9195/1240		
2.3	Axle loading, unladen front/rear	kg	3075/3360		
3.1	Tyres: Solid rubber, superelastic, pneumatic, polyurethane	pneumatic			
3.2	Tyre size, front	300-15-18PR			
3.3	Tyre size, rear	7.00-12-12PR			
3.5	wheels, number front/rear	2X2			
3.6	Tread, front	(mm)	1190		
3.7	Tread, rear	(mm)	1130		
4.1	Tilt of mast/fork carriage, forward /backward	α /β (°)	6/12		
4.2	Height, mast lowered	(mm)	2250		
4.3	Free lift	(mm)	150		
4.4	Lift	(mm)	3000		
4.5	Height, mast extended	(mm)	4260		
4.7	Height of overhead guard (cabin)	(mm)	2250 (2400)		
4.8	Seat height/stand height	(mm)	1350		
4.12	Towing coupling height	(mm)	340		
4.19	Overall length	(mm)	4280		
4.20	Length to face of forks	(mm)	3210		
4.21	Overall width, std/dual	(mm)	1490/1924		
4.22	Fork dimensions ISO2331	(mm)	50/150/1070		
4.23	Fork carriage ISO 2328, Class/type, A/B		ISO 3A		
4.24	Fork carriage width	(mm)	1380		
4.31	Ground clearance, laden, below mast	(mm)	155/130		
4.32	Ground clearance, centre of wheelbase	(mm)	186		
4.33	Load dimension b 12 *6 crossways		1000x1000		
4.34	Aisle width with predetermined load dimensions	(mm)	4695		
4.34.1	Aisle width with pallets 1000 mm x 1200 mm crossways	(mm)	4825		
4.34.2	Aisle width with pallets 800 mm x 1200 mm crossways	(mm)	4825		
4.35	Turning radius	(mm)	2850		
4.36	Internal turning radius	b13	845		
5.1	Travel speed, laden/unladen	km/h	Shift 2: 24/25 Shift 1: 17/18	Shift 2: 22/24 Shift 1: 15/16	Shift 2: 25/28 Shift 1: 18/19
5.1.1	Travel speed, laden/unladen, backwards	km/h	Shift 1: 19/20	Shift 1: 17/19	Shift 1: 21/22
5.2	Lifting speed, laden/unladen	mm/s	530/560		
5.3	Lowering speed, laden/unladen	mm/s	480/500		
5.6	Max. drawbar pull laden/unladen	N	30000/23000	25000/21000	31500/30000
5.7	Gradeability, laden/unladen	%	24/25	20/25	24/25
5.9	Acceleration time, laden/unladen	sec	with load: 5.05(S1)/4.76(S2) without load: 4.15(S1)/3.95(S2)	TBC	with load: 5.07(S1)/4.78(S2) without load: 4.15(S1)/3.95(S2)
5.10	Service brake		hydraulic		
7.1	Engine manufacturer/type		Mitsubishi S6S	Kubota V3800-CR-TE5CB-HYM-1	Kubota WG3800-GL-C
7.2	Engine power according to DIN ISO 1585	Kw	52	55.4	63.2
7.3	Rated speed	min-1	2300	2200	2400
7.4	Number of cylinders/displacement	-/cm3	6/4996		4/3769
7.5	Fuel consumption according to VDI cycle	l/h or kg/h	7.02 l/h or 5.9 kg/h	TBC	6.15 kg/h
7.6	Turnover output	lh	270 lh	TBC	280 lh
7.7	Energy consumption at turnover output	l/h or kg/h	9.26 l/h or 7.77 kg/h	TBC	7.93 kg/h
7.8	Generator	A	35		100
7.9	Vehicle electrical system voltage	V	24		12
7.10	Battery voltage/nominal capacity	V/Ah	2-12/60	12/120	12/90
8.1	Type of drive unit		E-Hydraulic		
10.1	Operating pressure for attachments	bar	195		
10.2	Oil volume for attachments	l/min	70		
10.4	Fuel tank capacity	L	100		
10.7	Sound pressure level at the driver's seat	dB (A)	88	81.5	88
10.7.1	Sound power level during the workcycle	dB (A)	109.6	99.7	109.6
10.8	Towing coupling, type DIN		PIN		

WA

NT

QLD

NSW

VIC

SA