



SOLAR HYBRID LIGHTING TOWER

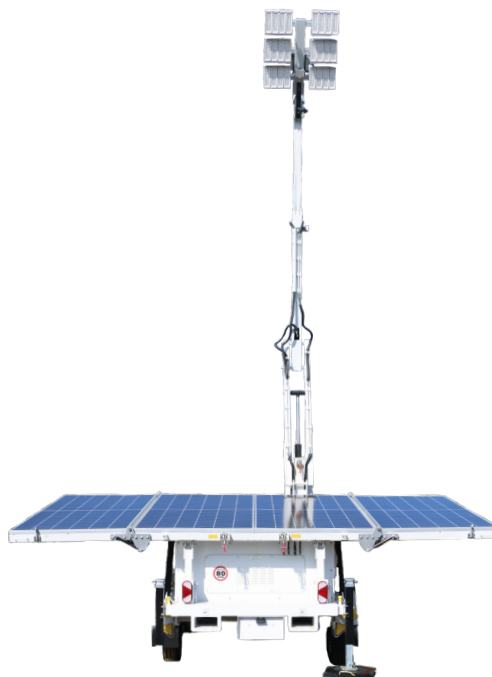

GP125K HYBRID

GENERAL

| | |
|------------------------|---|
| Model | Mine Spec - GP125k Hybrid |
| Lumen Output | 125,000 |
| Mast Height | 25 Feet |
| Mast Type | Hydraulic |
| Lights | 6 x 200w LED Modules |
| Coverage | 577 Feet x 528 Feet @ 5 lux |
| Light Bar Rotation | 355° Hydraulic |
| Light Bar Tilt | 70° Hydraulic |
| Trailer Type | Single Axle |
| Tyre and Rim Size | 15' |
| Stabiliser Supports | 5 x Manual |
| Mudguard / Wheel Chock | Included |
| Security | Wheel lock / hitch lock |
| Features | GPS, remote monitoring and control Dimmable lights, jack pads, fork pockets, lifting points |

OPERATIONAL DATA

| | |
|---------------------|---|
| Wind Rating | 60mph |
| Working Temperature | 32°F to 122°F (-13°F with optional kit) |

BATTERY

| | |
|---------------------|---|
| Battery | 15.4kWh Lithium Ion (LFP) |
| Runtime | 21 Hours |
| Solar | 1.8kWp |
| Solar Tilt | 10 to 55° Hydraulic |
| Efficiency (Diesel) | 1 hour of generator equals 3 hours of light |
| Efficiency (Solar) | 1 hour of sun equals 2 hours of light |

UNIT

| | |
|-----------------------|----------------------------|
| Dimensions (Stowed) | 117" x 93" x 100" (LxWxH) |
| Dimensions (Deployed) | 117" x 167" x 301" (LxWxH) |
| Weight | 5071 lbs |

