

KEY FEATURES

Globe Power's GPFL200 Smart Flood Light uses the latest renewable technology to provide a cost-effective lighting solution that does not require diesel input.

This unit runs for a minimum of 24 hours and can be used across multiple shifts on site, comfortably power an event, or provide a dusk to dawn lighting solution for safety requirements.

- 7 day timer
- AC charger
- Level alarm
- Dusk sensor
- Fork pockets
- Lifting lugs




- USER-FRIENDLY OPERATION INTERFACE
- SOLAR & ADVANCED LITHIUM ION BATTERY
- PORTABLE & EASY TO TRANSPORT
- AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

| | |
|--------------|---------------------------------|
| Model | Smart Floodlight - GPFL200 |
| Lumen Output | 23,000 |
| Mast Height | 16 ft |
| Mast Type | Cable winch |
| Lights | 2 x 100w LED Modules |
| Coverage | 12,140 ft ² at 5 lux |

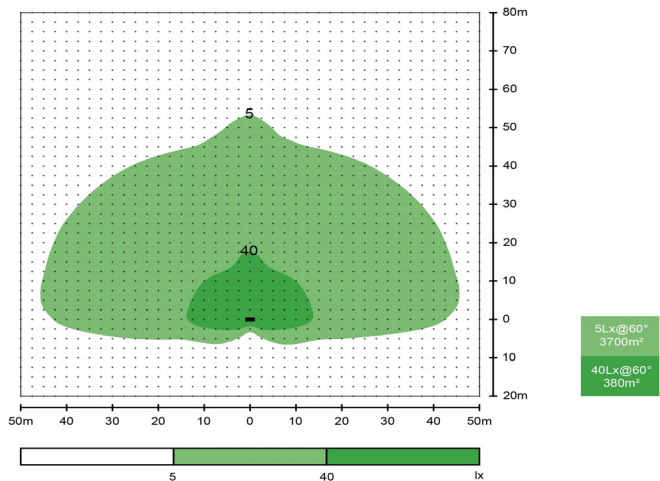

OPERATIONAL DATA

| | |
|---------------------|---|
| Wind Rating | 62 mph |
| Working Temperature | 32°F to 122°F (-13°F with optional kit) |
| Light Bar Tilt | 0 to 60° |
| Solar Orientation | 0 to 360° |

BATTERY

| | |
|------------------|------------------------------|
| Battery | 2.6kWh Lithium Ion (LFP) |
| Run Time | 24-60 hours |
| Solar | 340Wp |
| Solar Tilt | 0° to 90° |
| Solar Efficiency | 1 hr of sun/3.5 hrs of light |

UNIT INFORMATION

| | |
|-----------------------|--------------------------------|
| Dimensions (Stowed) | 39.4" x 39.4" x 114.2" (LxWxH) |
| Dimensions (Deployed) | 66.9" x 39.4" x 228.3" (LxWxH) |
| Weight | 386.4 lbs |