


## SOLAR HYBRID LIGHTING TOWER

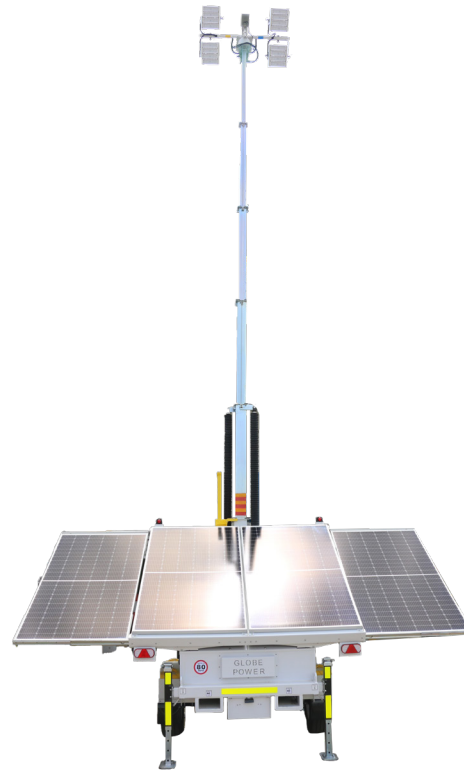

### SUNFLARE GP110K-H GENERAL

Model	Sunflare - GP110k-H
Lumen Output	110,000
Mast Height	30 Feet
Mast Type	Hydraulic/Cable
Lights	4 x 250w LED Modules
Coverage	426 Feet x 485 Feet @ 5 lux
Light Bar Rotation	355°
Light Bar Tilt	0° to 90°
Trailer Type	Single Axle
Tyre and Rim Size	15"
Stabiliser Supports	4 x Manual
Mudguard / Wheel Chock	Included
Security	Wheel lock/ hitch lock, wheel clamps
Features	Timer, day/night modes, jack pads, fire extinguisher, dimmer, isolators, fork pockets, lifting points, backup HATZ DC generator

### OPERATIONAL DATA

Wind Rating	60mph
Working Temperature	32°F to 122°F

### BATTERY

Battery	15.4kWh Lithium LFP
Runtime	27 Hours
Solar	1.8kWp
Solar Tilt	30°
Efficiency (solar)	1 hour of sun/2.5 hours of light

### UNIT

Dimensions (Transport)	144" x 88" x 115" (LxWxH)
Dimensions (Deployed)	144" x 172" x 382" (LxWxH)
Weight	4387 lbs

